

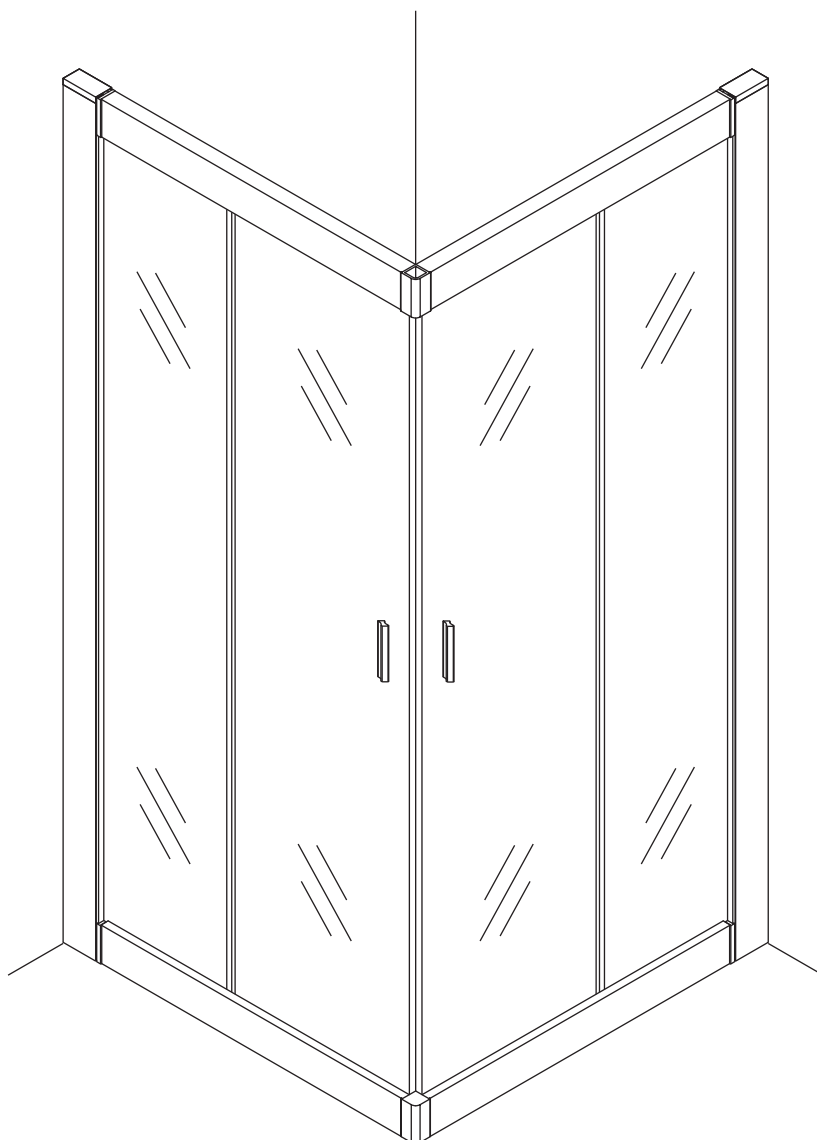


INSTALLATION MANUAL




CR-CE8080
CR-CE9090


RoHS **CE** ISO9001:2008

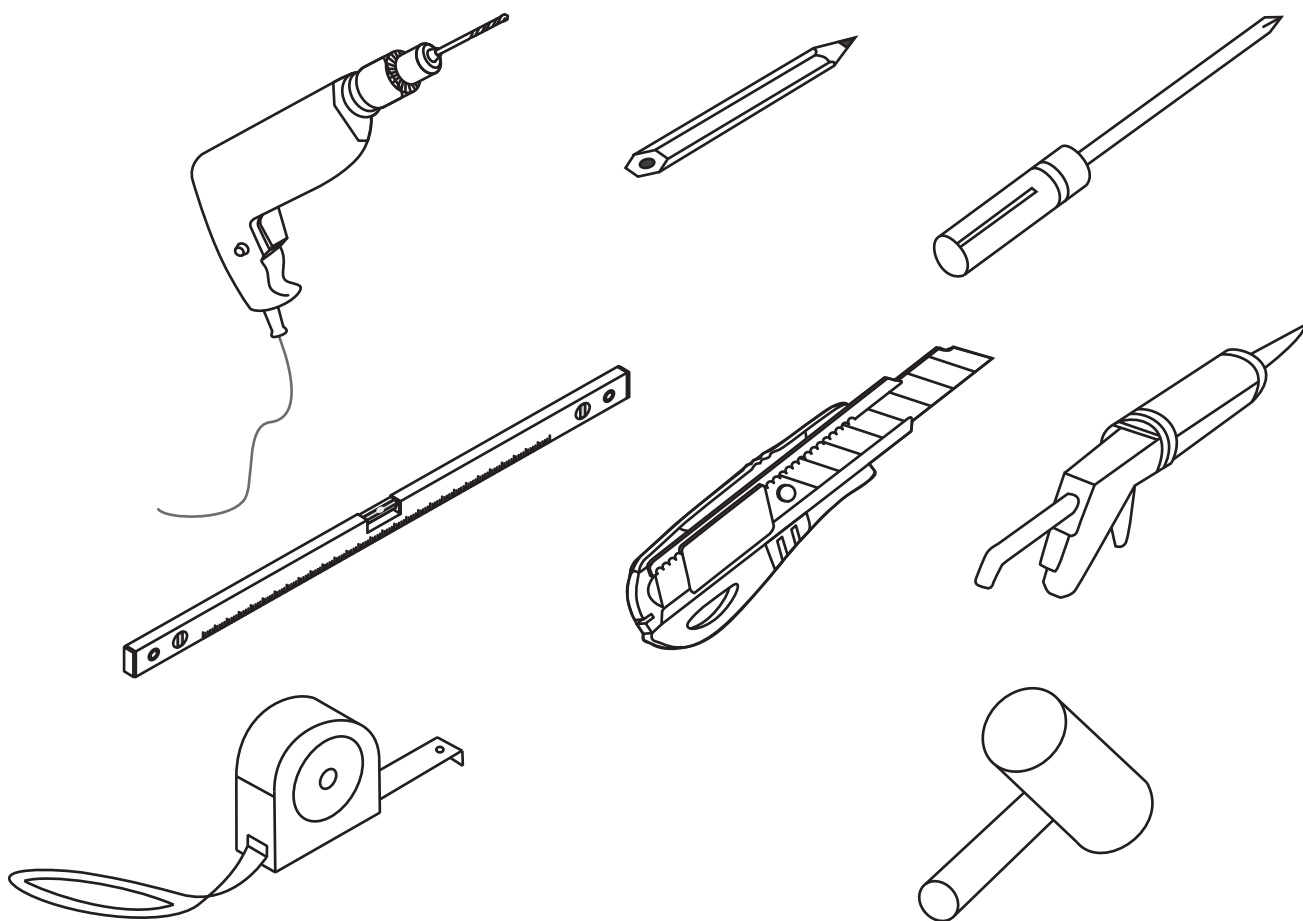


KQ-27




HG-15




GLASS




GLASS




handle




LZ-QL126




LZ-QL127




6B-2-15




6FX-2A




L gasket




PJ-4792/PJ-4795




PJ-4626




PJ-4796




PJ-4684/PJ-4685





KQ-07



PJ-4606





Install the wall profile.

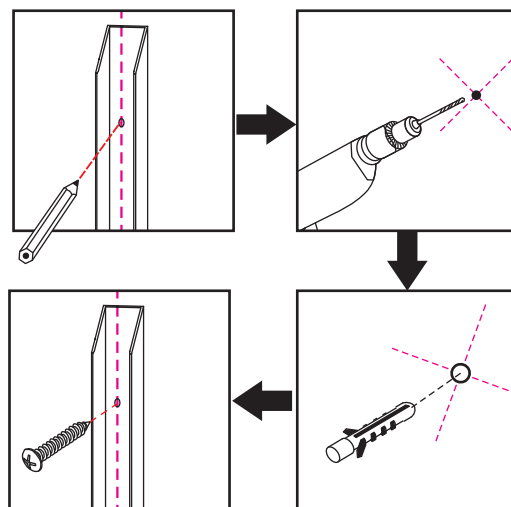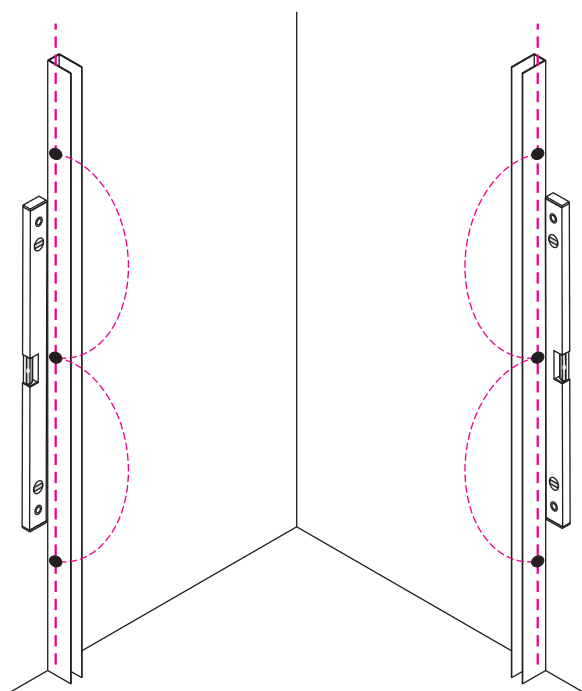


1

Install the frame profile.

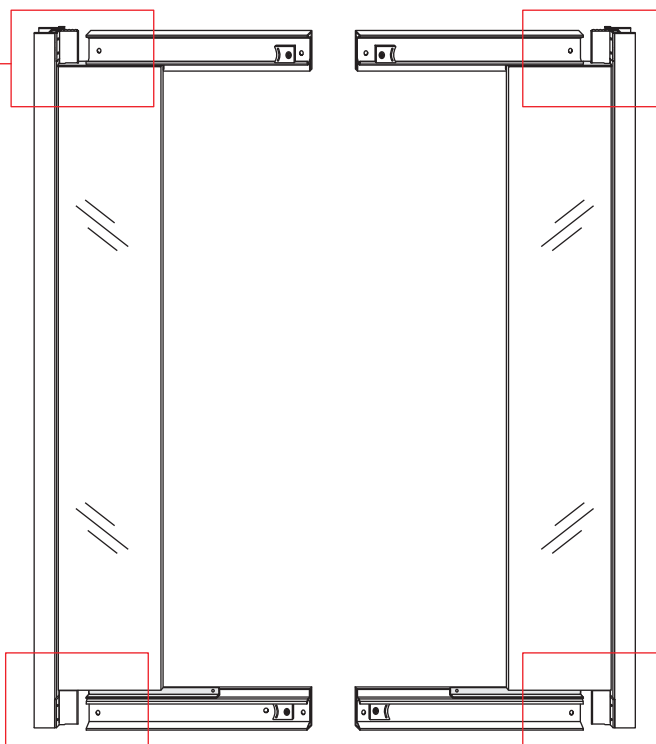


2

Install the top and bottom strap of fixed glass.

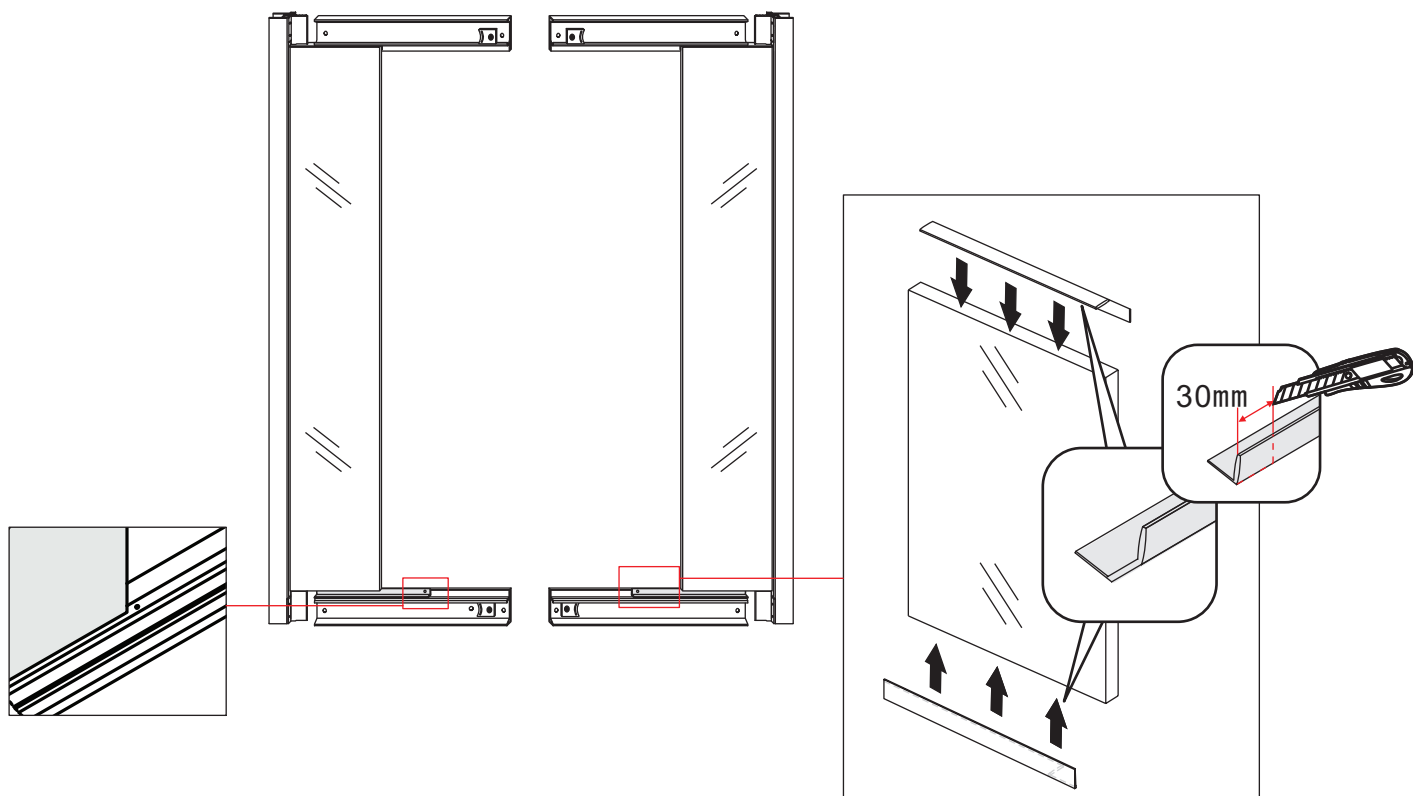


3

Install the 4 location block.

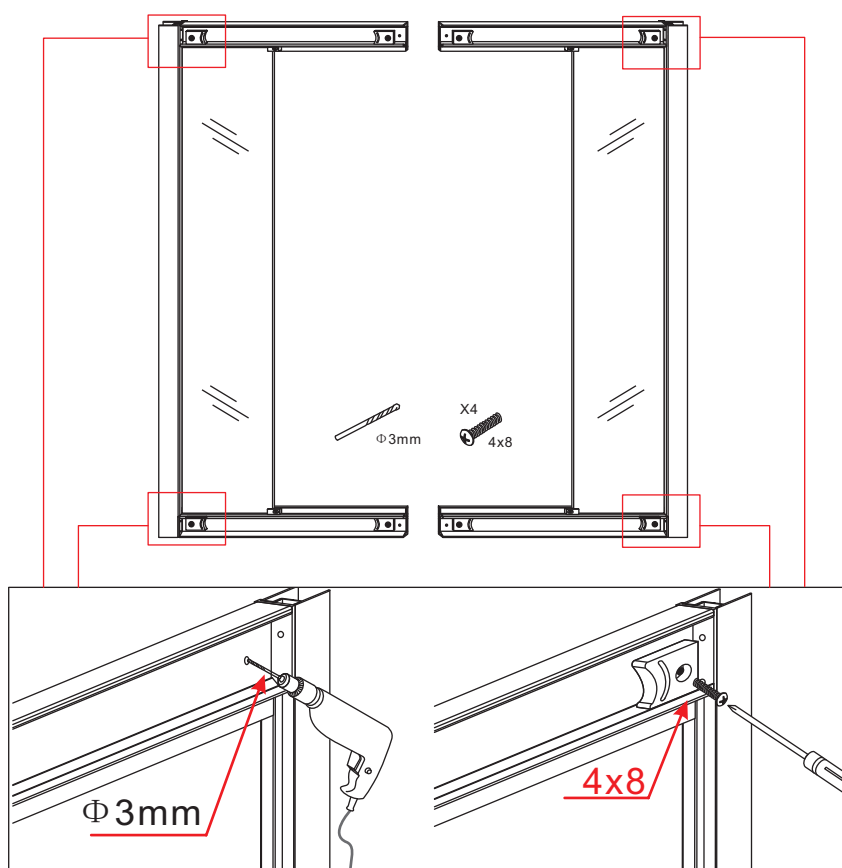

4


Install the fixed block of fixed glass.

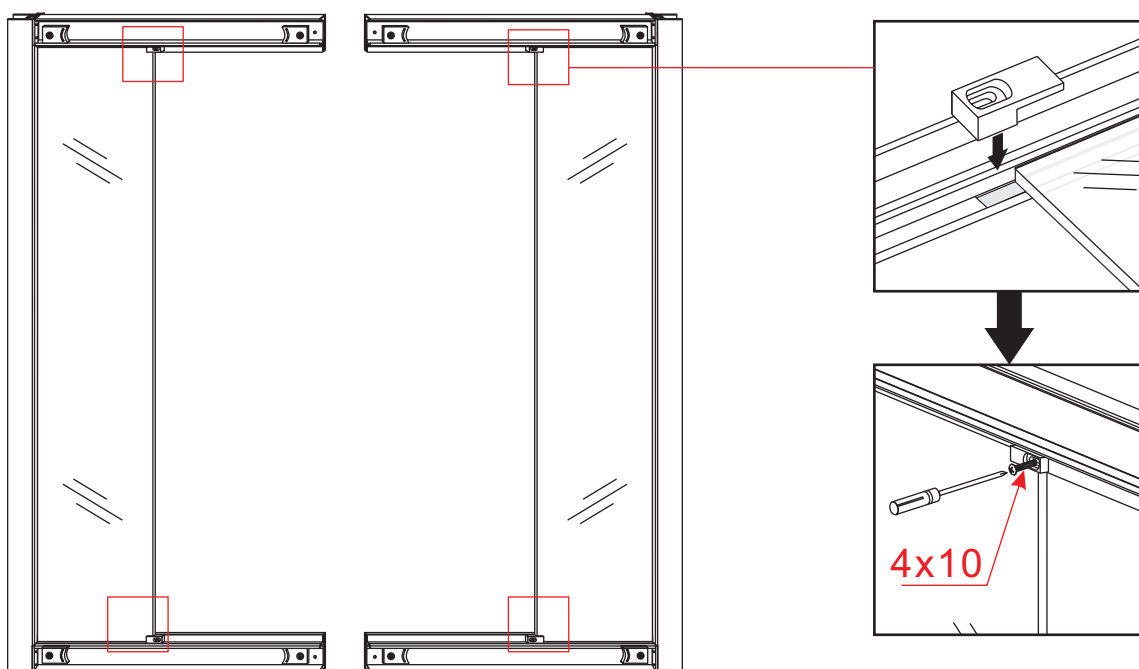

5




Install top and bottom connect part.

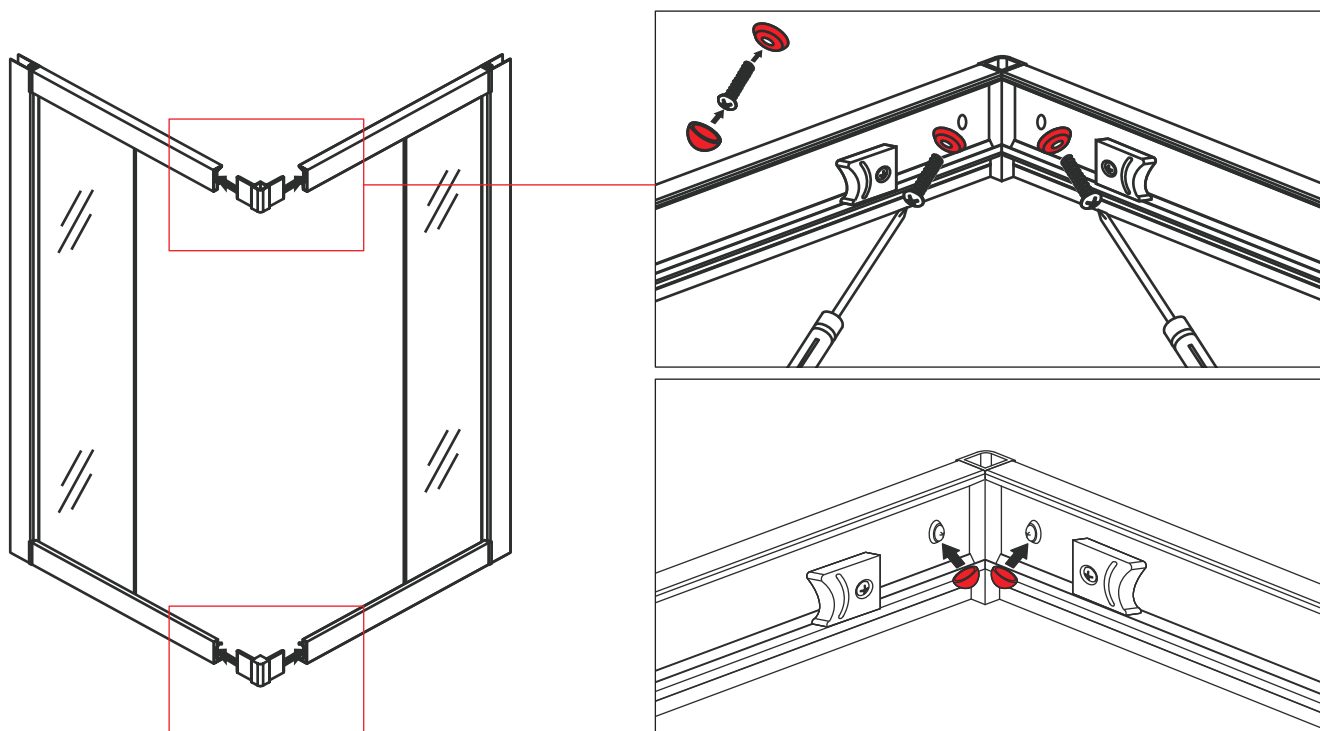

6




Install the the fixed glass into wall profile.

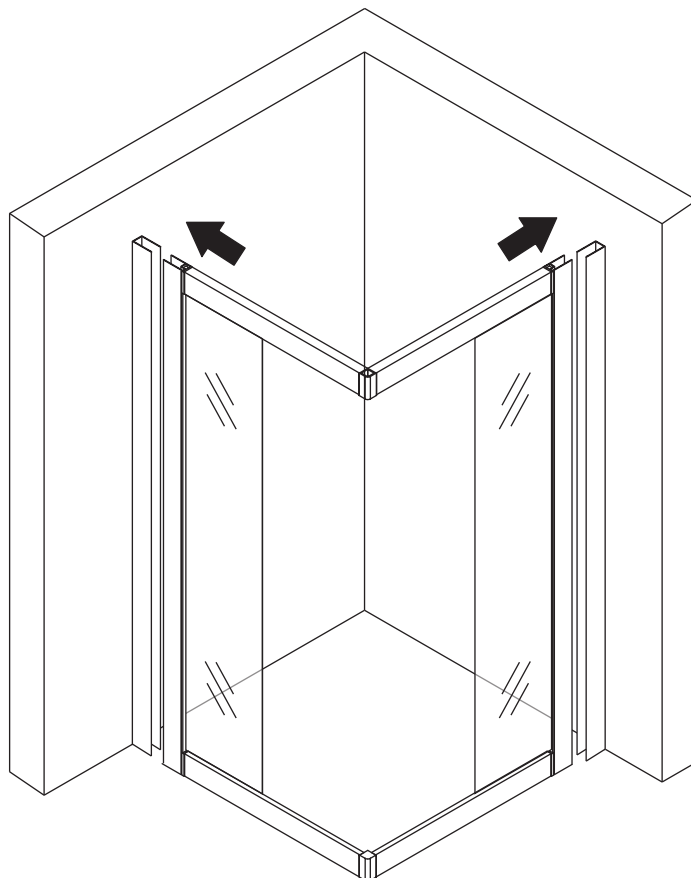


7

Install top and bottom wheels on door glass.

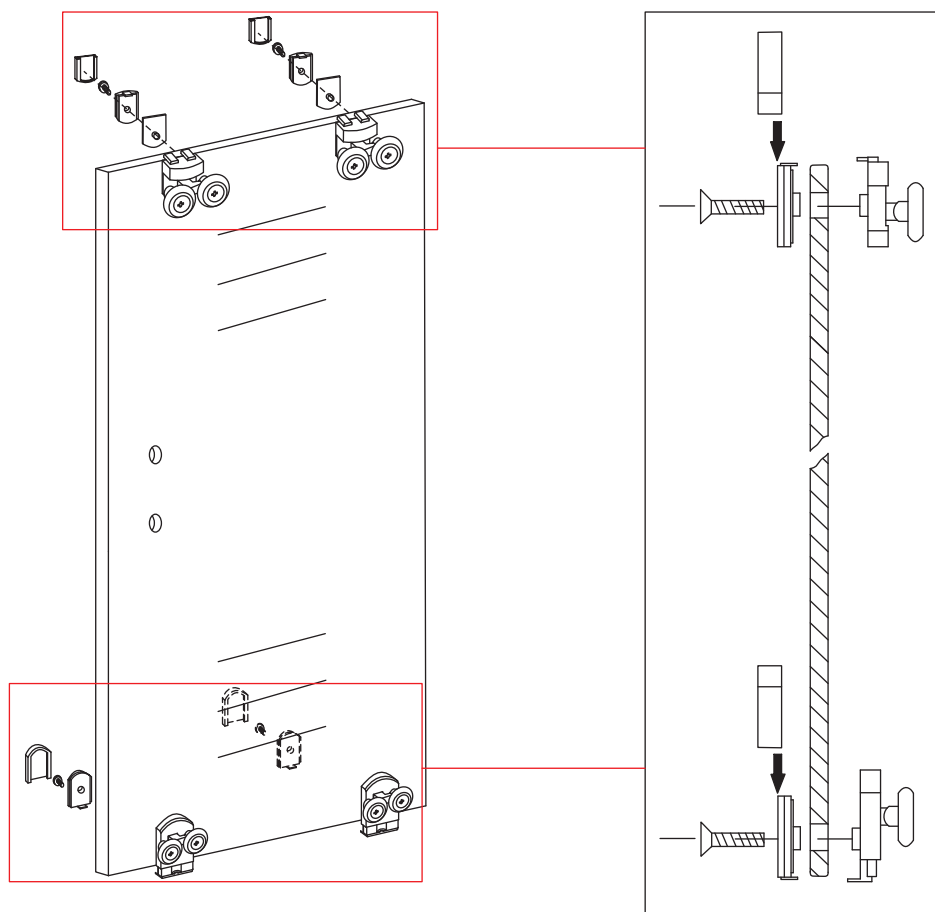


8

Install the handle.

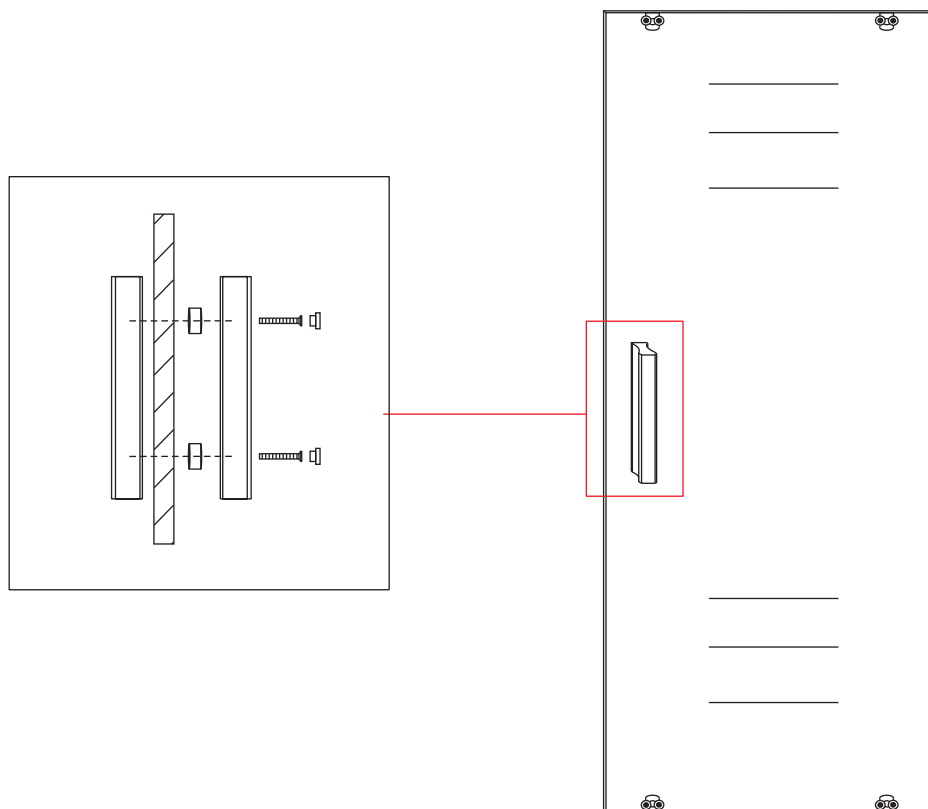


9

Insert the door glass into frame profile.

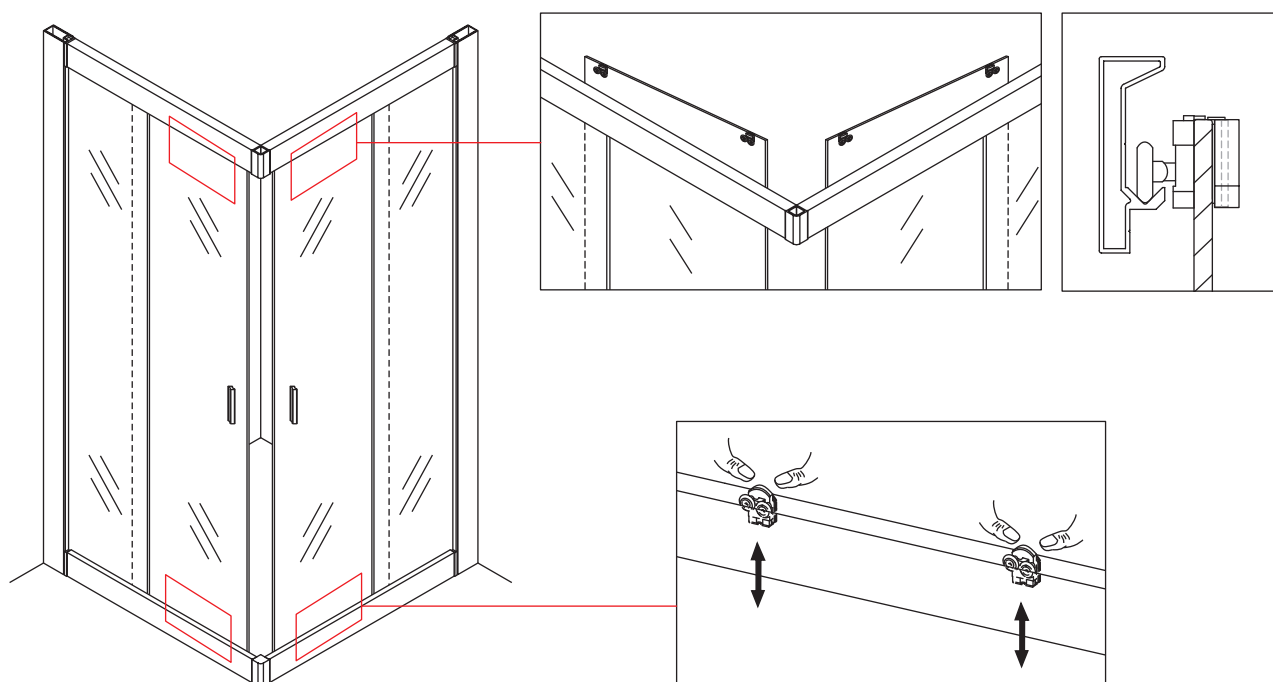


10

Install the magnetic strip.
Install the water-proof gasket between fixed and door glass.

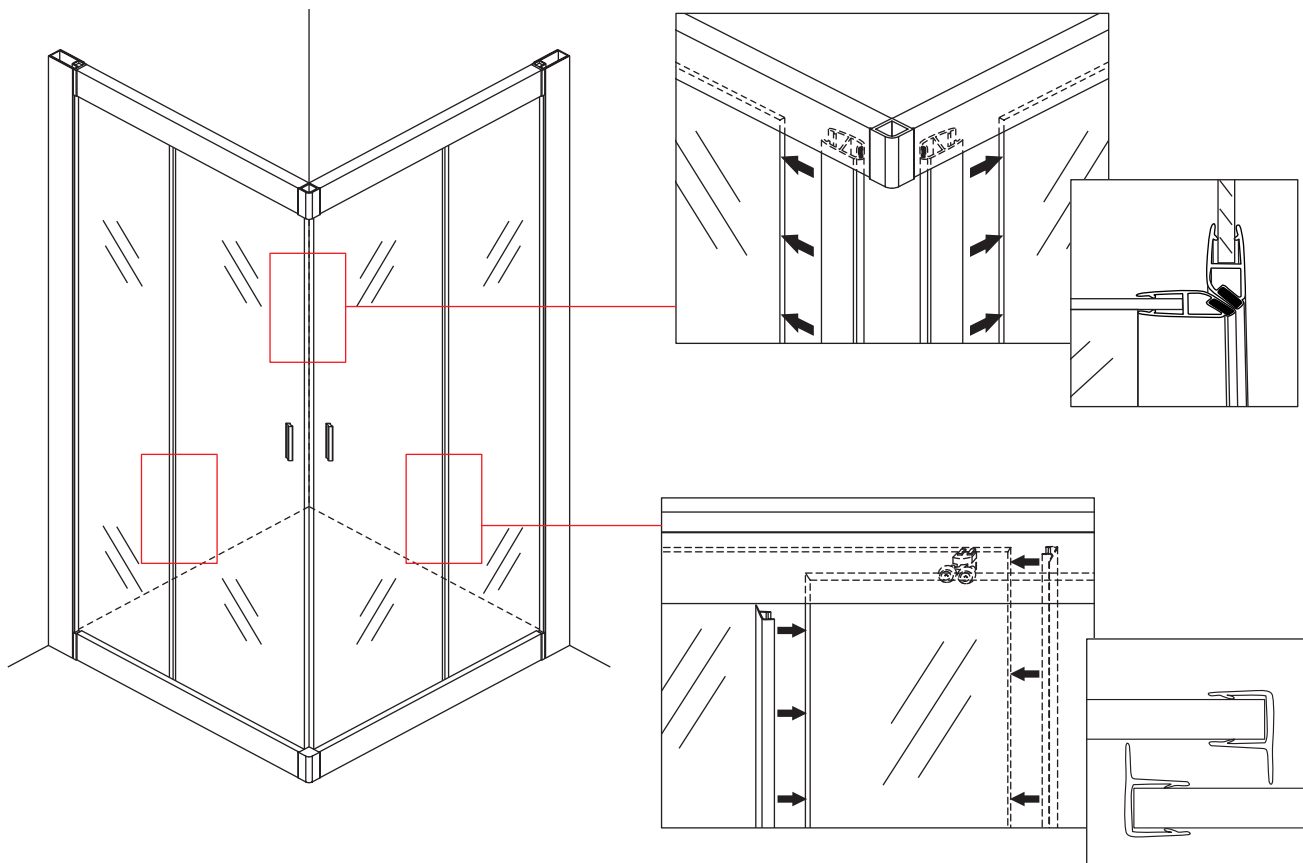

11

Install the screw into wall profile and top decorate part 2.
Make the glass gel then make sure without shower in 24hours.

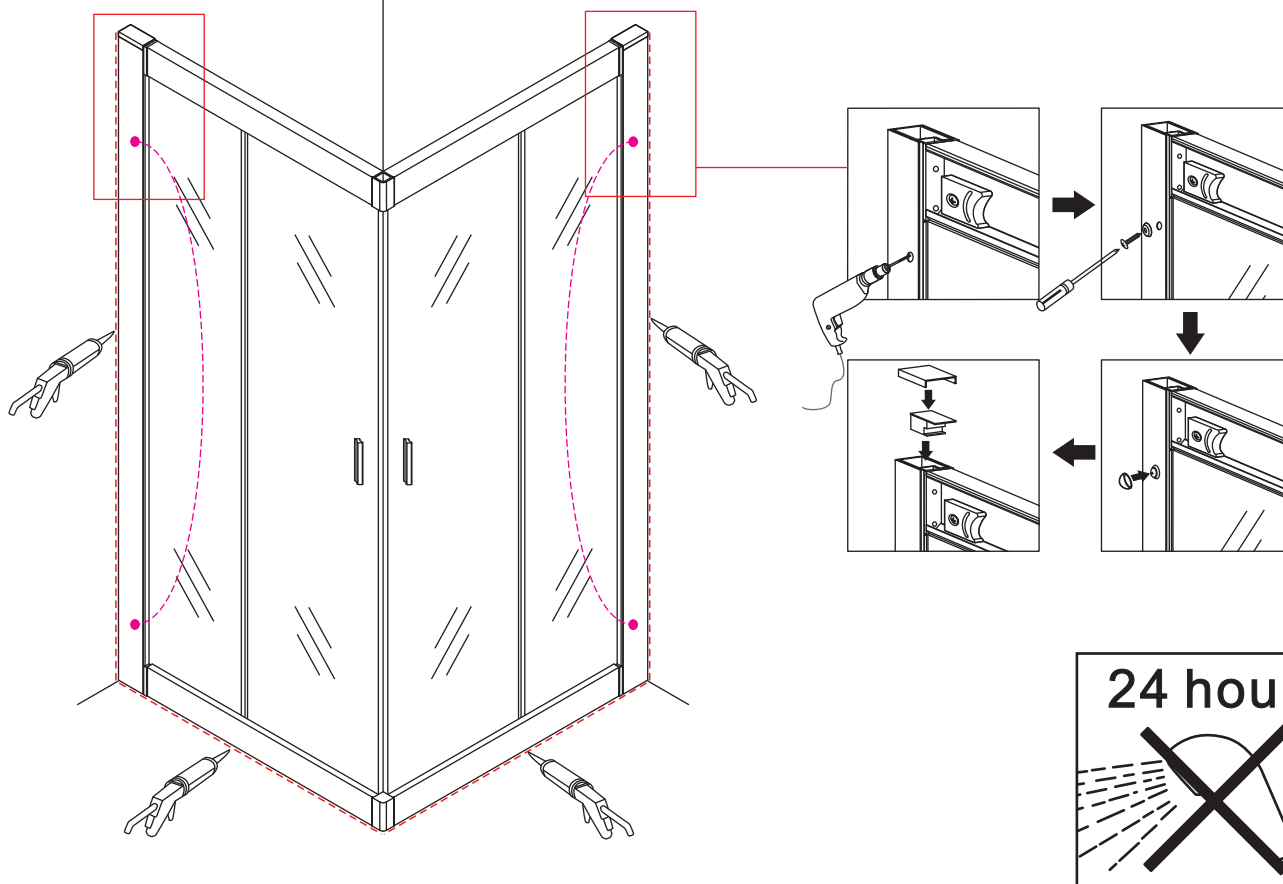

12